


DS-KIS902-S IP Video Intercom Kit

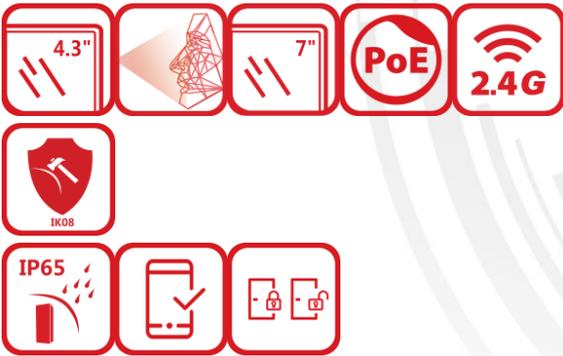

- Convenient Hik-Connect APP Mobile Control
- Multiple authentication methods: Face, Pin Code, Card, QR Code, Blue tooth
- Standard PoE power supply
- Stores messages and captured pictures in the TF card
- Including: Door station x1, Indoor station x1, PoE Switch x1, 32GB TF card x1

▪ Specification

Door station	
Operation system	Embedded Linux operation system
Flash	4 GB
RAM	1 GB
Door station	
Screen size	4.3-inch
Resolution	800 × 480
Type	IPS
Operation method	Capacitive touch screen
Brightness	425 cd/m ²
Door station	
Supplement light	IR light, up to 3 m
Resolution	Main stream: 1920 × 1080p, 720p Sub stream: 640 × 480p
Lens	2 × 2 MP
Wide dynamic range (WDR)	Support 120 dB
FOV	Horizontal: 88°, Vertical: 44°
Video Compression Standard	Main stream and sub stream: H.264 Third stream: H.265
Motion detection	Support
Door station	
Audio input	1 built-in omnidirectional microphone
Audio output	1 Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Audio compression standard	G.711 U, G.711 A
Audio compression Rate	64 Kbps
Door station	
Face capacity	10000
User capacity	20000
Linked indoor station capacity	500
Sub door station capacity	16
Card capacity	100000
Door station	
Network protocol	TCP/IP, RSTP
Wi-Fi	IEEE802.11b, IEEE802.11g, IEEE802.11n
Bluetooth	Reserved
Door station	
Card reading frequency	13.56 MHz
Face recognition distance	0.3 to 2 m
Face recognition accuracy rate	≥ 99%
Face recognition duration	< 0.2 s per person
Door station	
Network interface	1 RJ-45, 10/100 Mbps self-adaptive


RS-485	1
Alarm input	4 (2 exit buttons and 2 door contacts by default)
Lock control	2 relays, Max. 30 VDC 2 A, lock 2 needs secure module
Exit button	2
TAMPER switch	1
Door contact input	2
Door station	
Power consumption	≤ 6 W
Button	1 physical button(s)
Working temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Working humidity	10% to 90% (no-condensing)
Dimension	182 mm × 85 mm × 26 mm (7.16" × 3.34" × 1.01")
Installation	Surface mounting
Protection level	IP65, IK08
Indicator	/
Application environment	Outdoor
Power supply	IEEE802.3af, standard PoE 12 VDC, 1.5 A
Weight	Net weight: 0.405 kg; Gross weight: 0.752 kg
Indoor station	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB
Indoor station	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Indoor station	
Audio input	1 built-in omnidirectional microphone
Audio output	1 built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U, G.711 A
Volume adjustment	Adjustable
Audio compression Rate	64 Kbps
Indoor station	
Notice capacity	200
Linked indoor extensions capacity	16
Indoor station	
Wi-Fi	2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Protocol	TCP/IP, SIP, RTSP
Indoor station	
Network interface	1 RJ-45 10/100 Mbps self-adaptive
RS-485	1


Alarm input	8-ch alarm inputs
Alarm output	2
TF card	Max to 128 G
Indoor station	
Power consumption	≤ 5 W
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Power supply	12 VDC, IEEE802.3af, Standard PoE
Working humidity	10% to 90%
Dimension (L x W x H)	175 mm × 113.5 mm × 21 mm (6.9" × 4.5" × 0.83")
Installation	Wall mounting, table mounting
Application environment	Indoor
Weight	Net weight: 355 g (0.8 lb) Gross weight: 683 g (1.5 lb)

▪ **Available Model**

DS-KIS902-S

▪ **Dimension**

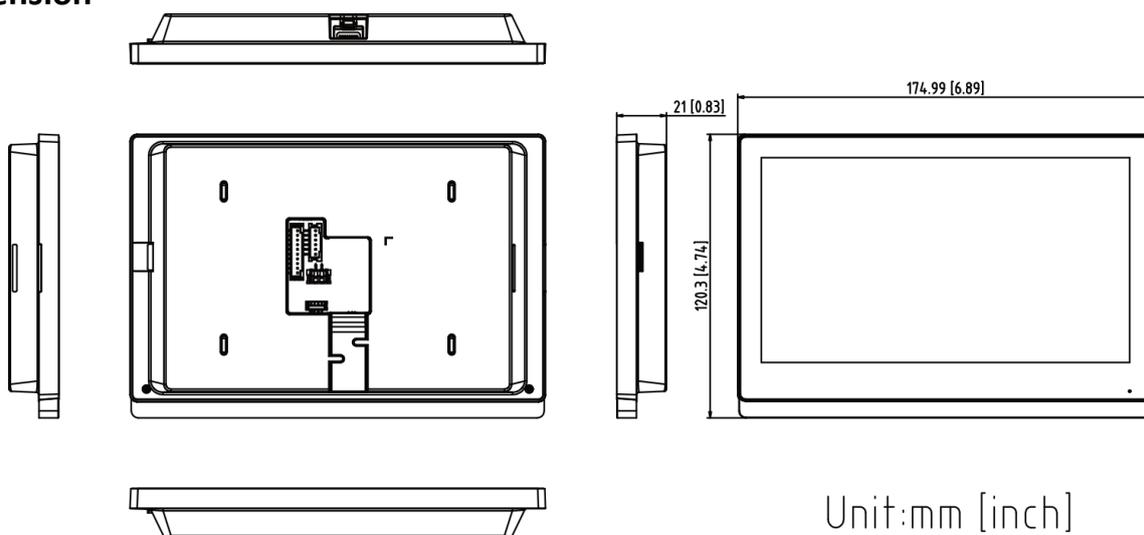

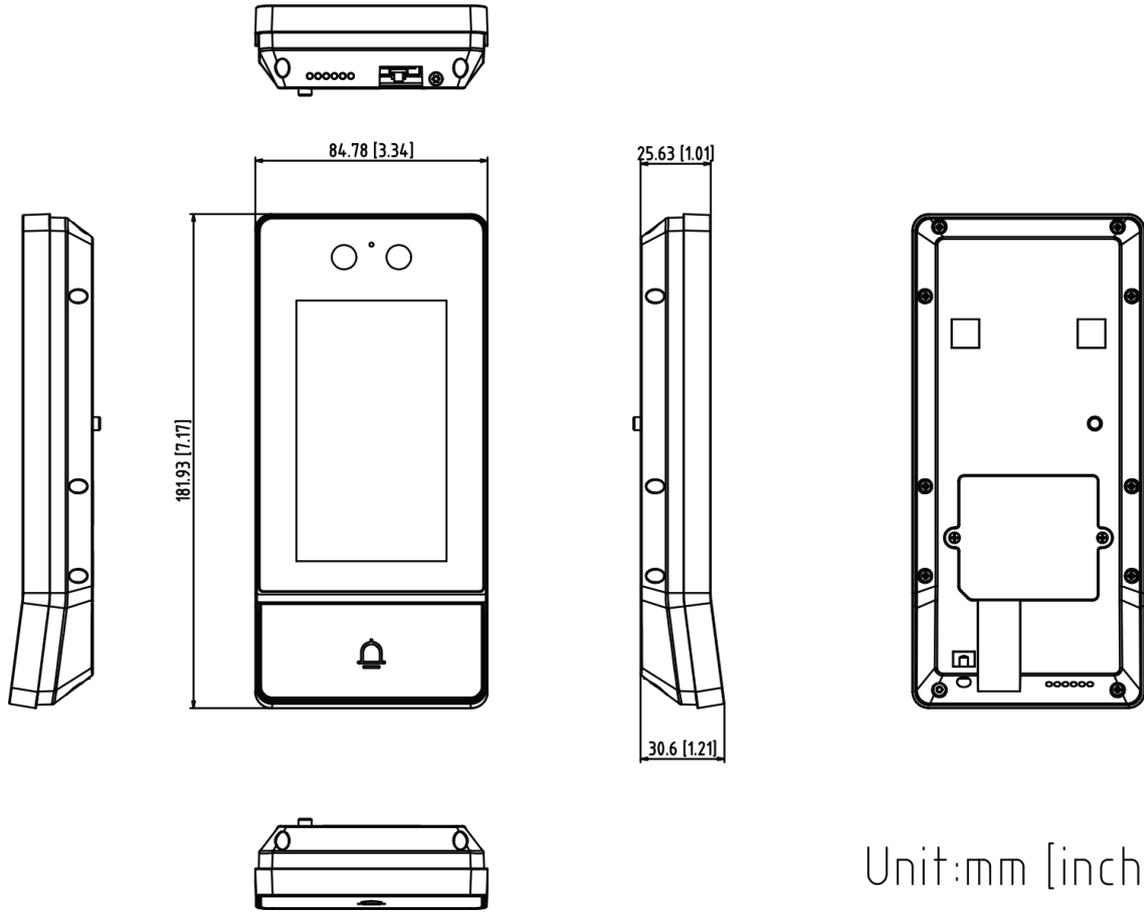

Unit:mm [inch]

▪ **Accessory**

▪ **Optional**

DS-KABH6350-T Table bracket	DS-KABV9503-RS Protective shield
	

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

