

iDS-E04HQHI-B 4-ch 2 MP 1U H.265 eSSD AcuSense DVR

Key Feature

- Powered by eSSD technology
- Deep learning based human and vehicle targets classification of Motion Detection 2.0 and perimeter protection
- Scene-adaptive bitrate control video compression
- Up to 3K/5 MP Lite@12 fps encoding capability
- Low power consumption
- Audio via coaxial cable



Built-In SSD

- Minimalist eSSD design brings low power consumption
- Integrated storage design provides the plug-and-play device use

Easy Installation

- Mini size design saves installation space
- Anti-vibration design and light weight satisfy more installation conditions

Compression and Recording

- Scene-adaptive bitrate control technology would precisely allocate videos in eSSD according to the actual scene
- Full channel recording at up to 3K/5 MP Lite resolution

Smart Function

- Deep learning-based motion detection 2.0
- Deep learning-based perimeter protection
- Smart search for efficient playback

▪ Specification


| Motion Detection 2.0 | |
|------------------------|---|
| Human/Vehicle Analysis | <p>Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights;</p> <p>Quick search by object or event type is supported;</p> |
| Perimeter Protection | |
| Human/Vehicle Analysis | Up to 4-ch |
| Recording | |
| Video Compression | H.265 Pro/H.265 |
| Encoding Resolution | 4 MP Lite/1080p/1080p Lite/720p/WD1/4CIF/CIF |
| Frame Rate | <p>Main stream:</p> <p>When 1080p Lite mode not enabled:</p> <p>For 4 MP stream access: 4 MP Lite@15 fps; 1080p Lite/720p/WD1/4CIF@25 fps (P)/30 fps (N)</p> <p>For 1080p stream access: 1080p/720p@15 fps; WD1/4CIF@25 fps (P)/30 fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF@25 fps (P)/30 fps (N)</p> <p>When 1080p Lite mode enabled:</p> <p>4 MP Lite@15 fps; 1080p Lite/720p Lite/WD1/4CIF@25 fps (P)/30 fps (N)</p> <p>Sub-stream: WD1/4CIF@12 fps; CIF@25 fps (P)/30 fps (N)</p> |
| Video Bitrate | According to the actual scene, scene-adaptive bitrate control technology would automatically allocates appropriate bitrate to ensure the stability of recording period. |
| Stream Type | <p>Video, Video & Audio</p> <p>Note: In order to protect privacy, the device will only record video (without audio) by default. If you want to record audio, you shall manually enable audio recording. For operation details, refer to the user manual.</p> |
| Audio Compression | G.711u |
| Audio Bitrate | 64 Kbps |
| Video and Audio | |
| IP Video Input | <p>1-ch</p> <p>Up to 6 MP resolution</p> <p>Support H.265+/H.265 IP cameras</p> |
| Analog Video Input | <p>4-ch</p> <p>BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection</p> |

| | |
|----------------------------|---|
| HDTVI Input | 5 MP@20 fps, 3K@20 fps, 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@60 fps, 720p@50 fps, 720p@30 fps, 720p@25 fps |
| AHD Input | 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps |
| HDCVI Input | 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps |
| CVBS Input | Support |
| HDMI Output | 1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz |
| VGA Output | 1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz |
| Video Output Mode | HDMI/VGA simultaneous output |
| Audio Input | 4-ch via coaxial cable |
| Audio Output | 1-ch via HDMI |
| Synchronous playback | 4-ch |
| Network | |
| Total Bandwidth | 72 Mbps Incoming bandwidth: 4 Mbps |
| Remote Connection | 32 |
| Network Protocol | TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS |
| Network Interface | 1, RJ45 10/100 Mbps self-adaptive Ethernet interface |
| Auxiliary Interface | |
| Capacity | Built-in 512 GB eSSD (480 GB available) Note: The device can store about 2 weeks videos for 4-ch analog cameras (default parameters), this estimation is for reference only |
| USB Interface | Rear panel: 2 × USB 2.0 |
| Alarm In/Out | N/A |
| General | |
| Power Supply | 12 VDC, 1 A |
| Consumption | ≤ 5.4 W (with eSSD) |
| Working Temperature | -10 °C to 45 °C (14 °F to 113 °F) |
| Working Humidity | 10% to 90% |
| Dimension (W × D × H) | 151 × 121 × 46 mm (5.94 × 4.76 × 1.81 inch) |
| Weight | ≤ 0.5 kg (with eSSD, 1.1 lb.) |

Note:


Analog and IP signal input types are not configurable, and analog channel cannot be disabled to increase the maximum accessible number of network cameras.

Physical Interface

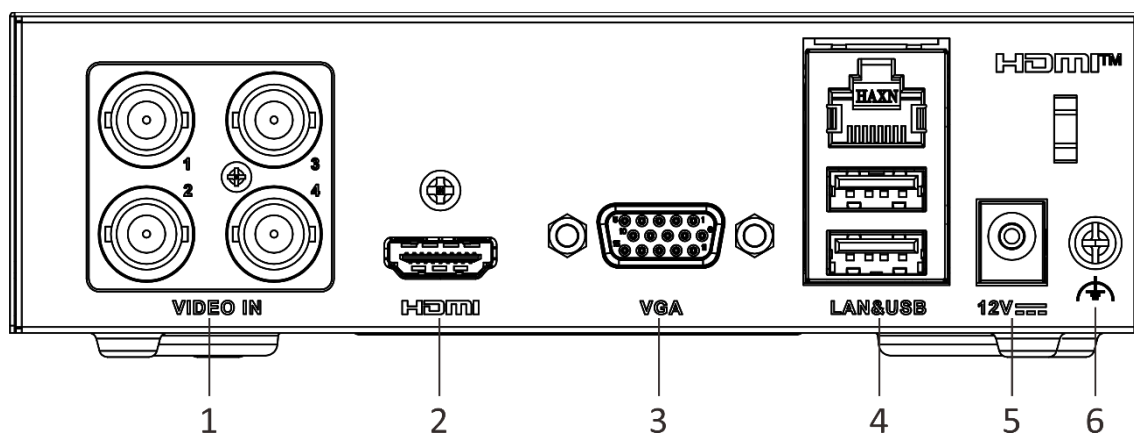

| No. | Description | No. | Description |
|-----|----------------------------|-----|---|
| 1 | Video and coaxial audio in | 4 | LAN network interface and USB interface |
| 2 | HDMI interface | 5 | Power supply |
| 3 | VGA interface | 6 | GND |

Dimension

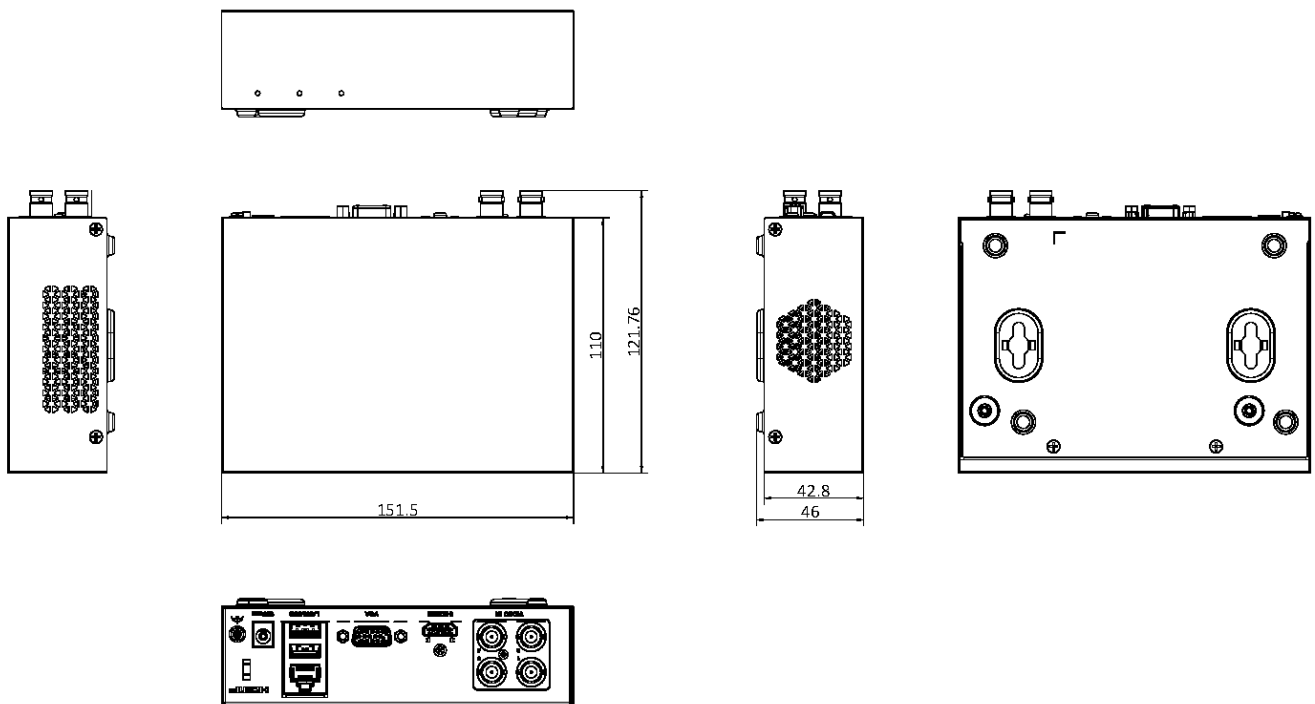

Scale 1:1 Unit: mm

Available Model

iDS-E04HQHI-B

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq